




Lloyd 's Machinery equipment, Alemania.

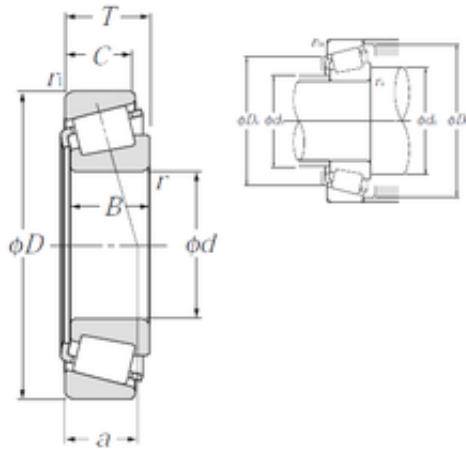

19,987 mm x 47 mm x 14,381 mm NTN
4T-05079/05185 Rodamientos De Rodillos
C ó nicos

Bearing No. 4T-05079/05185

4T-05079/05185 Bearing 2D drawings and 3D CAD models

Size	19.987x47x14.381 mm
Bore Diameter	19,987 mm
Outer Diameter	47 mm
Width	14,381 mm
d	19,987 mm
D	47 mm
T	14,381 mm
B	14,381 mm
C	11,112 mm
ra1 max.	1,3 mm
a	4,2 mm
Da	40,5 mm
db	24 mm
ra max.	1,5 mm
da	26,5 mm
Db	42,5 mm
Weight	0,117 Kg
Basic dynamic load rating (C)	24 kN
Basic static load rating (C0)	24,2 kN
(Grease) Lubrication Speed	8 600 r/min
(Oil) Lubrication Speed	11 000 r/min
Calculation factor (e)	0,36
Calculation factor (Y0)	0,92
d1	32.5 mm



Lloyd 's Machinery equipment, Alemania.

e	0.36
Y2	1.68
Y0	0.92
Mass	0.12 kg
Dynamic load, C	24 kN
Rating life coefficient, A2	1.4
Static load, C0	24.2 kN
Fatigue limit load, Cu	2.95 kN
Nlim (oil)	11,000 rpm
Nlim (grease)	8,600 rpm
Min operating temperature, Tmin	-40 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.49 Hz
Characteristic outer ring frequency, BPF0	6.21 Hz
Characteristic inner ring frequency, BPF1	8.79 Hz
ra max	1.5 mm
r1a max	1.3 mm
Category	Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.123
Product Group	B04334